

MODULYS RM GP

Rack-mounted modular UPS system
from 25 to 75 kVA/kW



Full rack integration

- Designed for easy and no-risk integration in 19" rack cabinets.
- Total compatibility with any 19" standard rack cabinet.
- High power density.
- Easy to manage, integrate and customise.
- Flexible simplified cabling.

Overall cost optimisation

- Time saving integration process.
- No risk of cost and budget overruns.
- Compact solution saving valuable space.
- Simplified logistics.
- Easy integration: avoids costly set-up and reworking.

Totally redundant design

- N+1 redundancy level.
- Designed for no single point of failure.
- No centralised parallel control.
- Totally independent power modules.

Enhanced serviceability performance

- Power module automatic firmware alignment.
- Fast & safe maintenance based on hot-swap parts (power modules, bypass, electronic boards, batteries).
- Ready for concurrent maintenance.
- Load fully protected in double conversion mode (VFI) during power module replacement.
- 3-colour LED bar for quick and easy detection of the power module status.
- Battery can be hot-swapped without shutting down the connected equipment.
- Totally front access operation.

'Forever Young' concept

- Exclusive life cycle extension programme.
- Eliminates end-of-life criticality.
- Based on an electronics-free sub-rack enclosure + a set of plug-in parts.
- Module compatibility guaranteed for 20+ years.
- Allows for the implementation of future module technology.
- Company declaration of 20-year compatibility.

The solution for

- > Integration in 19" standard rack cabinets
- > Computer rooms
- > Data centers
- > Edge Computing
- > Banks
- > Healthcare facilities
- > Insurance
- > Telecom
- > Infrastructures

Certifications and attestations



Green Power 2.0 MODULYS RM GP module is certified by TÜV SÜD with regard to product safety (EN 62040-1).

Green Power 2.0 MODULYS module efficiency & performance are tested and verified by TÜV SÜD.



SERMA TECHNOLOGIES


Green Power 2.0 MODULYS RM GP module MTBF is calculated and verified 1,000,000 hours by SERMA TECHNOLOGIES (IEC 62380).



Advantages



Up to 4 x 25 kW



Highest rack-mounted UPS power density on the market



Unity power factor provides the best €/kW ratio



Unity power factor provides the best €/kW ratio



High efficiency minimises energy consumption and reduces energy costs



Ready for Li-Ion battery. Ultra-fast recharge function



Standard electrical features

- Dual input mains.
- Internal maintenance bypass.
- Backfeed protection: detection circuit.
- EBS (Expert Battery System) for battery management.
- Auto battery test.
- Battery temperature sensor.

Electrical options

- 19" 4U battery rack.
- External battery cabinet.
- High capacity battery charger.

Standard communication features

- User-friendly 7" touch-screen multilingual colour graphic display.
- 2 slots for communication options.
- USB port to download UPS report and log file.
- Ethernet port for service purpose.
- Commissioning wizard.

Technical data

		MODULYS RM GP	
		9U	15U
Model			
Number of power modules		1 to 2 x 25 kW	1 to 4 ⁽¹⁾ x 25 kW
Configuration		N, N+1 redundant	
Power (Sn)		25 to 50 kVA	25 to 75 kVA
Power (Pn)		25 to 50 kW	25 to 75 kW
Input/output		3/3	
INPUT			
Voltage		400 V 3ph+N (340 V to 480 V)	
Frequency		50/60 Hz ±10%	
Power factor/THDI		> 0.99/< 1.5%	
OUTPUT			
Voltage		380/400/415 V ±1% 3ph+N	
Frequency		50/60 Hz ±0.1%	
Voltage distortion		< 1% (linear load), < 3% (non-linear load according to IEC 62040-3)	
Short-circuit current		up to 3 x In	
Overload		125% for 10 minutes, 150% for 1 minute	
Crest factor		3:1	
HOT-SWAP BYPASS			
Voltage		Rated output voltage ±15% (configurable from 10% to 20%)	
Frequency		50/60 Hz ±2% (configurable for GenSet compatibility)	
Weight		7 kg	7.5 kg
EFFICIENCY (TÜV SÜD VERIFIED)			
Online double conversion mode		up to 96.5%	
ENVIRONMENT			
Ambient temperature		0 °C to 40 °C (15 to 25 °C for maximum battery life)	
Relative humidity		0 to 95% without condensation	
Maximum altitude		1000 m without derating (3000 m max)	
Acoustic level at 1 m		< 53 dBA	
UPS RACK			
Dimensions W x D x H		442 mm x 920 mm x 9 U	442 mm x 920 mm x 15 U
Weight (empty cabinet)		36 kg	42 kg
Degree of protection		IP20	
HOT-SWAP POWER MODULE			
Height		3U	
Weight		34 kg	
Type		Hot plug-in/Hot-swappable	
MTBF		> 1000000 hours (calculated and verified)	
HOT-SWAP BATTERY RACK			
Type		Acid leak-proof - Long Life batteries	
Protection		Independent protection for each battery string	
Dimensions W x D x H		442 mm x 890 mm x 4 U	
Weight (empty rack)		15 kg	
STANDARDS			
Safety		EN 62040-1, EN 60950-1	
EMC		EN 62040-2 Class C2	
Performance		EN 62040-3 (VFI-SS-111)	
Product declaration		CE, RCM (E2376), EAC	

(1) 4th module is for redundancy.

Communication options

- Dry-contact interface (configurable voltage-free contacts).
- MODBUS RTU RS485 or MODBUS TCP.
- BACnet/IP interface.
- NET VISION: professional WEB/SNMP Ethernet interface for secure UPS monitoring and remote automatic shutdown.
- REMOTE VIEW PRO supervision software.
- IoT gateway for Socomec cloud services and SoLive UPS mobile app.
- Remote touch-screen panel.

Remote monitoring and cloud services

- LINK-UPS: Socomec 24/7 remote monitoring service connecting your installation to the nearest Socomec Service Centre.
- SOLIVE UPS: mobile app enabling the monitoring of the UPS systems from a smartphone.

Total resilience

- Electronics-free (failure-free) sub-rack enclosure.
- Totally independent and self-sufficient modules.
- Real module selective disconnection (automatic inverter bypass with galvanic separation).
- No centralised control for parallel and load sharing management.
- Totally segregated, fully sized and centralised auxiliary mains bypass.
- Configurable N+1 redundancy (power & battery).
- No single point of failure.
- Redundant parallel bus connection (ring configuration).

Optimum reliability

- Power module designed for superior robustness verified by an independent body (MTBF > 1,000,000 hr).
- Hybrid bypass architecture with distributed module's bypass and centralised mains bypass for ultimate reliability and robustness.
- Highly robust bypass (MTBF > 10,000,000 hr)
- Acid leak-proof modular battery box.

Maximum availability

- Fast recovery of lost redundancy thanks to minimum MTTR (Mean Time To Repair).
- No risk of downtime during power upgrading and maintenance.
- No risk of failure propagation.

Our dedicated Expert Services for UPS

We offer services to ensure your UPS highest availability:

- > Commissioning
- > On-site intervention
- > Preventive maintenance visits
- > 24-hour call out and rapid on-site repairs
- > Maintenance packages
- > Training
- > Remote monitoring service



www.socomec.com/services

MODULYS RM GP

Three-phase UPS

from 25 to 75 kVA/kW

The benefit of a system designed for 19" rack integration

Easy to integrate

- Specifically designed for integration in 19" standard rack cabinets.
- Adjustable rails and mounting accessories.
- High power density (>6 kW/U).
- Low weight for easy integration.
- Pre-cabled system for simplified connections.
- Flexible cabling management for top, bottom and mixed top/bottom entry cable.
- Integrated cables organiser for tidy connections.
- Low power dissipation (<40 W per supplied kW).

No-risk integration

- Assured compatibility with any 19" standard rack cabinet.
- Pre-engineered and lab-tested parts assuring total system reliability.
- Automatic self-configuration power modules.
- No risk of design oversize due to project data uncertainty thanks to power module scalability.

Easy to customise

- Complete set of pre-engineered and pre-tested parts to meet any customer need:
 - modular Power Modules,
 - special power modules with extra battery charger for extremely long BUT,
 - plug-in J-BUS communication board for BMS integration,
 - plug-in SNMP board for UPS monitoring and shutdown management,
 - plug-in programmable dry-contact board,
 - environmental sensors,
 - blank panels (covers for empty slots),
 - rack-mounted battery modules,
 - external battery cabinet,
 - isolation transformer,
 - bypass redundant cooling.

Easy to manage


- Full documentation package including schematics, integration instructions, technical sheets, etc.
- Factory-set configurations for easy model selection.
- Full set of pre-engineered options for easy product customisation.

Pre-cabled system for simplified connections

- > Designed for complete integration in any 19" standard rack cabinet.



Example of integration (3x25 kW). Only 15 U of rack space occupied: space-saving design leaving free space for other rack-mounted devices. One empty slot in the MODULYS RM GP sub-rack remains available for power upgrade or redundancy.

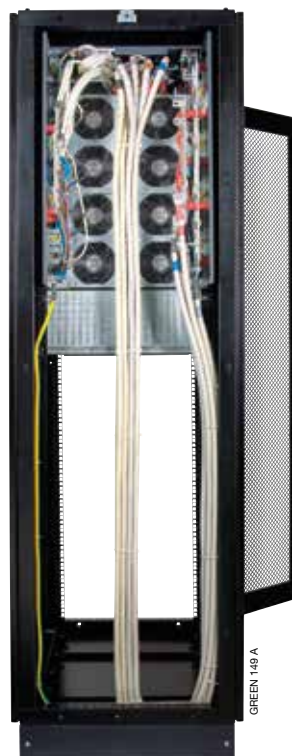

Rear view (before adding rear protective cover). Flexible cabling management for easy connections and tidier cabling.

MODULYS RM GP

Three-phase UPS
from 25 to 75 kVA/kW

Overall cost optimisation

- Compact sub-rack enclosure saving valuable cabinet rack space.
- 2 sub-rack enclosure models for optimum sizing.
- Best-in-class €/kW ratio thanks to high power density and PF=1.
- Cost-optimised solution for minimum initial investment.
- Plug & Play and self-configuration power modules for easy and time saving system set up.
- Pre-engineered and lab-tested parts for easy and time saving customisation.
- Repeatable and standardised architecture for time saving design and know-how capitalisation.

Simplified logistics

- Fewer standardised parts for easy ordering.
- Parts always in stock for fast procurement.
- Fewer parts covering a wide range of configurations, power, back-up time and options.
- Once integrated in the 19" rack cabinet, MODULYS RM GP can be safely shipped with the power modules plugged in.

Compact 15U sub-rack enclosure

- Designed for complete integration in any 19" standard rack cabinet.



Pre-cabled rack with maintenance bypass

M4-R-075-82B0 15U rack, 4 slots
M4-R-050-82B0 9U rack, 2 slots

Plug-in boards

CP-OP-ADC+SL Programmable IN/OUT dry contact + serial link
CP-OP-MODTCP MODBUS TCP interface
NET-VISION6CARD NET VISION card, WEB/SNMP interface IPV4/IPV6

Other options


NET-VISION-EMD Environment temp. and humidity sensor + 2 dry contacts
MAS-OP-TEMP External temperature sensor

Blank panel

M4-RI-OP-SSC Cover for empty slot

Power module - 25 kW

M4-RI-25

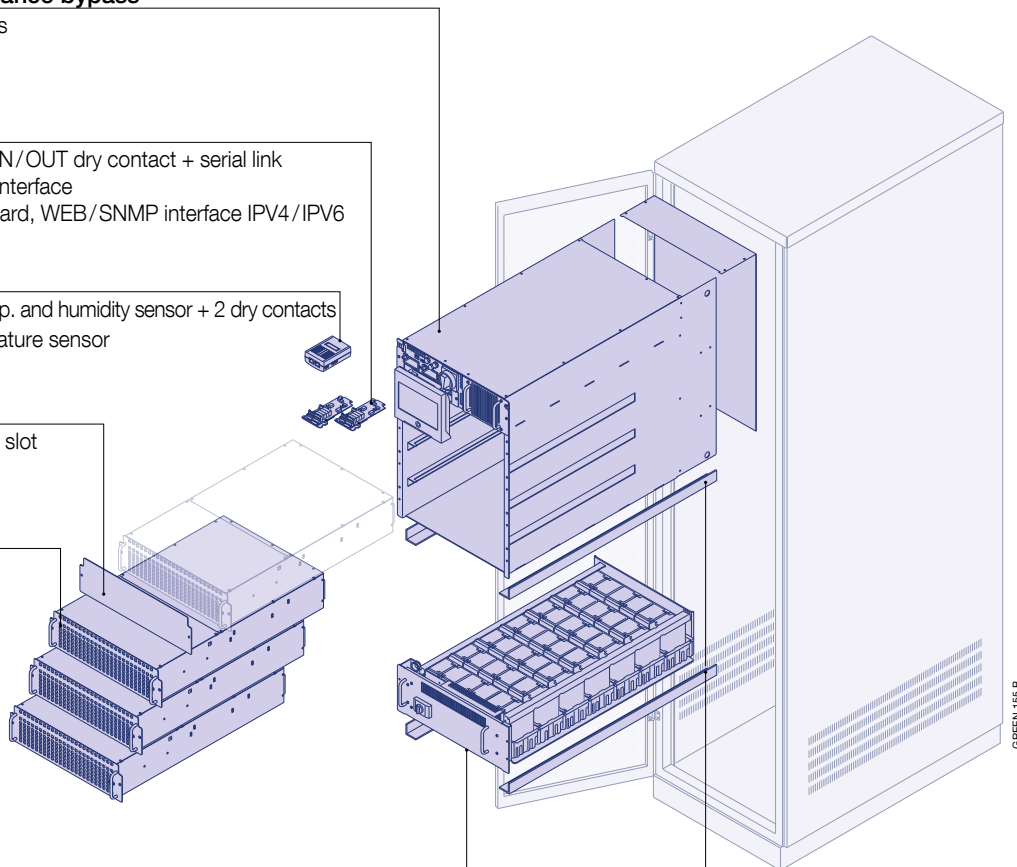

4U battery rack

M4-BR-009L With 42 x 9Ah batteries, fuse and switch
M4-BR-009L-B Empty, for 42 x 9Ah batteries including interconnections, fuses and switch

Mounting accessories

M4-RI-OP-RAIL Adjustable rails for rack mounting support