

# NETYS PL

User-friendly multi-socket protection  
600 and 800 VA



**NETYS PL**  
600 VA

**NETYS PL**  
800 VA

## The solution for

- > PC: LCD or CRT monitors, scanners, printers, etc.
- > Cash registers
- > Interactive terminals

## Technology

- > VFD "offline"

## Certifications



## An innovative solution and superior design

- Compact and practical pluggable power protection integrating a larger number of sockets adapted to computer and IT peripherals in small office and home office environments, facilitating connection and tidier cabling.
- Modern design suitable for positioning over/under the desk or floor installations.
- Complementary USB port on the top for recharging mobile devices (e.g. phones, MP3, etc.).


## Adapted protection to meet all your needs

- 6 output sockets (British, French or German/Italian standards) for easy distribution directly to your applications:
  - 4 sockets protected against power cuts and overvoltages, aimed at your most sensitive applications (professional desk top systems, workstation and monitors). The back-up time (up to 30 minutes) enables standard PC tasks and configuration to be saved.
  - 2 sockets protected against overvoltage alone for use with less critical applications and high absorption consumers (e.g. laser printers).


## Easy to use

- Operating mode indicated by means of the smart LED indicator lights.
- Easy battery maintenance and replacement.
- Integrated mains input cable on the side, allowing all six sockets to be used.

## Connections

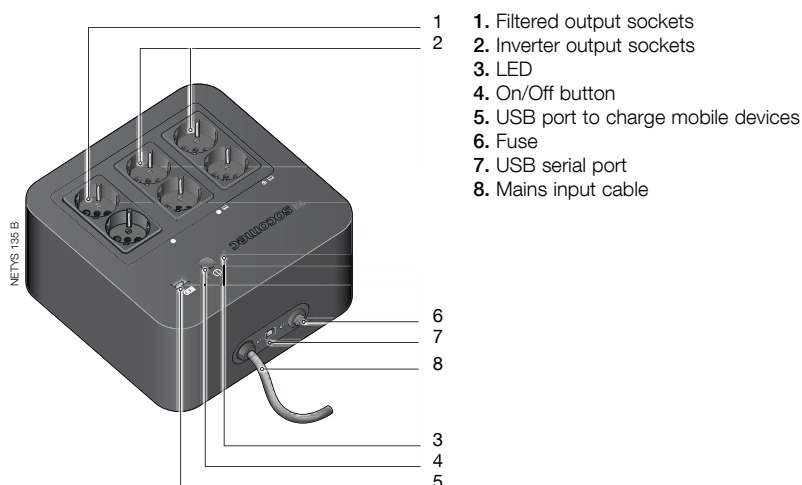

## Socket types

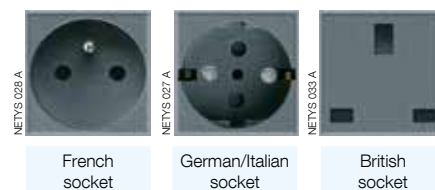

## Standard electrical features

- USB port to charge mobile devices



## Technical data

NETYS PL						
Model	NPL-0600-B	NPL-0600-D	NPL-0600-F	NPL-0800-B	NPL-0800-D	NPL-0800-F
Sn	600 VA			800 VA		
Pn	360 W			480 W		
Power (surge)	1200 VA					
Input/output	1/1					
<b>INPUT</b>						
Rated voltage	230 V					
Voltage tolerance	180 ÷ 270 V					
Rated frequency	50/60 Hz with automatic selection					
Mains connection	Cable with plug					
<b>OUTPUT</b>						
Rated voltage	230 V ±10%					
Rated frequency	50/60 Hz ±1%					
Wave form	Step wave					
Protection	Overload, significant discharge and short circuit					
Sockets	4 sockets for UPS and surge protection, 2 sockets for surge protection					
Socket standard	British	German/Italian	French	British	German/Italian	French
<b>BATTERIES</b>						
Type	Sealed lead-acid maintenance free - expected life 3/5 years					
Back-up time <sup>(1)</sup>	15 min			20 min		
<b>COMMUNICATION</b>						
Interfaces	USB					
Local communication software	Local View					
<b>UPS CABINET</b>						
Dimensions W x D x H	220 x 220 x 123 mm					
Weight	3.6 kg			4.1 kg		
Colour	Black			White		
<b>STANDARDS</b>						
Safety	IEC/EN 62040-1, AS 62040.1.1, AS 62040.1.2					
EMC	IEC/EN 62040-2, AS 62040.2					
Product declaration	CE, RCM (E2376)					

(1) PC + 17" LCD monitor.

## Standard communication features

- USB port for UPS management based on HID protocol.
- LOCAL VIEW software for local UPS monitoring and shutdown for Windows, Linux and MAC Osx.