


STATYS XS

16A / 32A

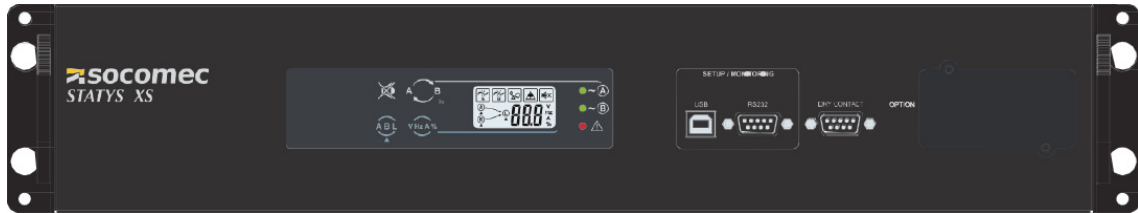

Dimensions					
	Model	Width [mm]	Depth [mm]	Height [mm]	Weight [kg]
	16A	440 (19")	285	44 (1U)	4
	32A		360	88 (2U)	6

Connections			
	Model	INPUT	OUTPUT
	16A	2x IEC C20 (16A)	1x IEC C19 (16A) 8x IEC C13 (10A)
	32A	Terminal 2x 3P (6 mm ²)	2x IEC C19 (16A) 16x IEC C13 (10A)

Electrical characteristics	16A	32A
Rated mains supply voltage	200 / 208 / 220 / 230 / 240 V	
Input voltage range	150Vac to 300Vac	
RMS voltage tolerance	+/-10% (configurable +/-5% to +/-20%)	
Rated Frequency	50 / 60 Hz	
Frequency tolerance	+/-10% (configurable +/-5% to +/-20%)	
Typical transfer time (ms)	8 ms	
Admitted overload	125% / 1 minutes, 150% / 30 seconds	

Communication and options	16A	32A
Display	LCD + Display	
Standard communication features	Slot for optional communication board	
	5 dry contacts (Volt free) - Configurable	
	Setting port for configuration tool	
Options	SNMP communication board	
	RS485 Communication board	

Electrical characteristics - Environment	16A	32A
Storage conditions	-5 to 40°C @ 20 to 90% RH (non-condensing)	
Working temperature	-5 to +40 °C	
Working relative humidity	20 - 90% (non-condensing)	
Noise	< 25dBA	
Conformity	CE compliant	
Directives	2014/35/UE ; 2014/30/UE	
Standards	IEC60950-1 ; CEI/EN 62310-2	
Environmental	WEEE ; ROHS	